

RENOLIT L 20

Description

RENOLIT L 20 is a coppery lubricating grease with lithium soap copper content.

Application

RENOLIT L 20 is used for lubrication of slip rings, collectors, interrupting, grinding and sliding contacts, and other contact elements.


RENOLIT L 20 is water resistant.

Shelf Life

The minimum shelf life is 36 months if the product is properly stored between 0°C and 40°C in its unopened original container in a dry place.

Advantages

- Good water resistance
- Protects from corrosion
- Good wear protection
- Good adhesiveness
- Good aging resistance

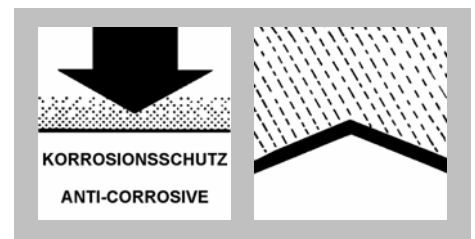



RENOLIT L 20

Characteristics

Properties	Unit	Value	Test Method
Classification	-	MF 2 K-30	DIN 51 502□
Colour	-	copper-coloured	-
Thickener	-	Lithium-Soap	-
Dropping point	°C	175	IP 396
Penetration worked (Pw 60)	0,1 mm	265 - 295	DIN ISO 2137
NLGI-grade	-	2	DIN 51 818□
Base oil viscosity at 40°C at 100°C	mm ² /s	100 8	DIN 51 562-1
Temperature range	°C	-30 up to- +120	-